81-65

# RESULTS OF A RECONNAISSANCE WATER-QUALITY SAMPLING PROGRAM OF THE OGALLALA AQUIFER IN COLORADO, KANSAS, NEBRASKA, OKLAHOMA, SOUTH DAKOTA, AND TEXAS

NEWARK PUBLIC LIBRARY

NOV 17 1981

U. S. GOVT. PUBS.
DEPOSITORY 376

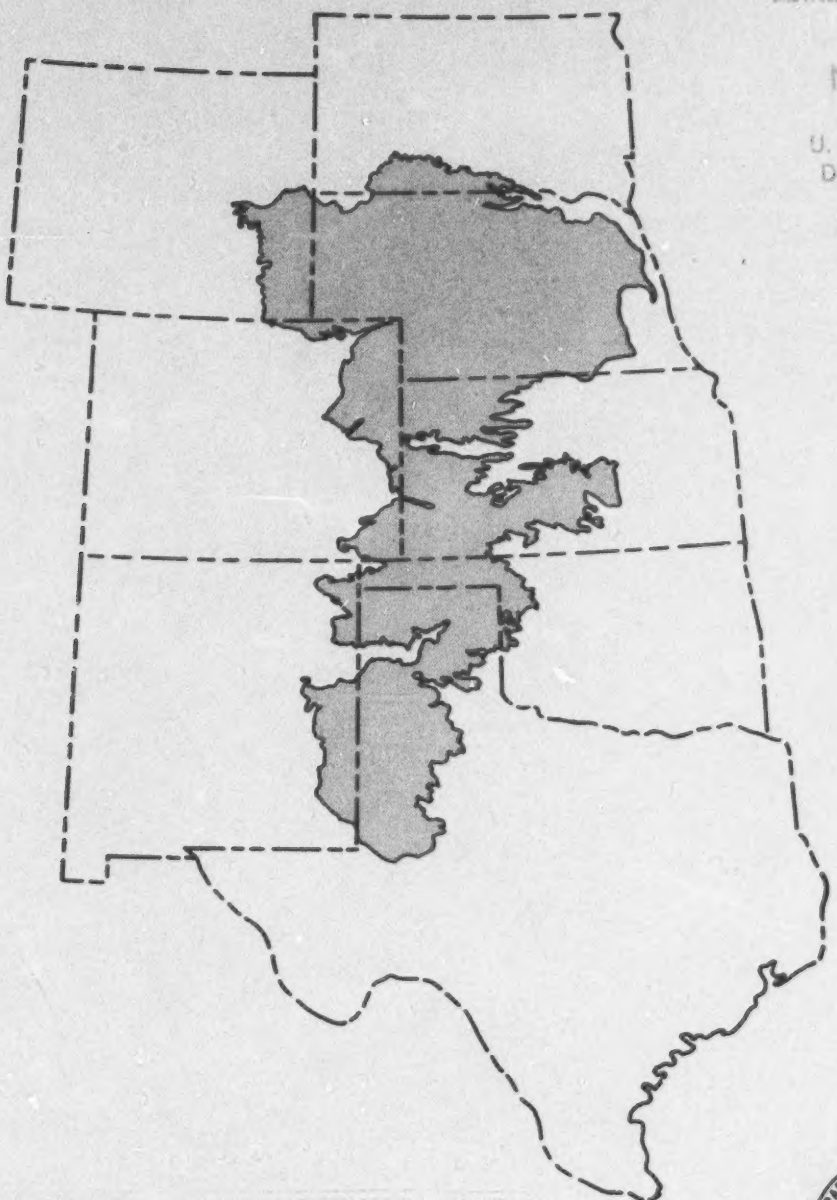

U.S. GEOLOGICAL SURVEY
WATER RESOURSES INVESTIGATION 81-65

I 19.42/4:

50272-101

| REPORT DOCUMENTATION PAGE | 1. REPORT NO. 81-65 | 2. | 3. Recipient's Accession No. |
|---|---|---|---|

**4. Title and Subtitle**
RESULTS OF A RECONNAISSANCE WATER-QUALITY SAMPLING PROGRAM OF THE OGALLALA AQUIFER IN COLORADO, KANSAS, NEBRASKA, OKLAHOMA, SOUTH DAKOTA, AND TEXAS

**5. Report Date** October 1981

**6.**

**7. Author(s)**

**8. Performing Organization Rept. No.** USGS/WRI 81-65

**9. Performing Organization Name and Address**
U.S. Geological Survey, Water Resources Division
Box 25046, Mail Stop 412
Denver Federal Center
Denver, Colorado 80225

**10. Project/Task/Work Unit No.**

**11. Contract(C) or Grant(G) No.**
(C)
(G)

**12. Sponsoring Organization Name and Address**
U.S. Geological Survey, Water Resources Division
Box 25046, Mail Stop 412
Denver Federal Center
Denver, Colorado 80225

**13. Type of Report & Period Covered** Final

**14.**

**15. Supplementary Notes**

**16. Abstract (Limit: 200 words)**

Results of a reconnaissance water-quality sampling program of the Ogallala aquifer indicates the water generally is suitable for most uses. Fluoride and selenium were the only chemical constituents found to exceed the National Interim Primary Drinking Water Regulations in water from some of the wells.

Unusually large silica concentrations in many of the water samples probably were due to the presence of amorphous silica in relatively young volcanic-ash deposits present in the aquifer. Because the greatest silica concentrations (as much as 65 milligrams per liter) occurred in the Northern part of the aquifer, the volcanic source was probably from the northwest.

**17. Document Analysis a. Descriptors** Aquifer characteristics--water quality, geochemistry, chemical analysis, South Dakota, Nebraska, Kansas, Colorado, Oklahoma, Texas

**b. Identifiers/Open-Ended Terms** Geochemical reconnaissance, Regional Aquifer Systems Analysis (RASA), Ogallala aquifer

**c. COSATI Field/Group**

**18. Availability Statement** No restriction on distribution.

**19. Security Class (This Report)**

**20. Security Class (This Page)**

**21. No. of Pages** 7

**22. Price**

(See ANSI-Z39.18) See Instructions on Reverse

OPTIONAL FORM 272 (4-77)
(Formerly NTIS-35)
Department of Commerce

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

# RESULTS OF A RECONNAISSANCE WATER-QUALITY SAMPLING PROGRAM OF THE OGALLALA AQUIFER IN COLORADO, KANSAS, NEBRASKA, OKLAHOMA, SOUTH DAKOTA, AND TEXAS

By G. L. Feder and N. C. Krothe

---

Water Resources Investigations 81-65

Denver, Colorado

1981

UNITED STATES DEPARTMENT OF THE INTERIOR

JAMES G. WATT, Secretary

GEOLOGICAL SURVEY

Doyle G. Frederick, Acting Director

---

For additional information write to:

Project Chief
U.S. Geological Survey
Box 25046, Mail Stop 413
Denver Federal Center
Lakewood, Colorado 80225

blank page

## CONTENTS


| | Page |
|---|---|
| Abstract | 1 |
| Introduction | 2 |
| Sampling | 2 |
| Results | 2 |
| Summary and conclusions | 6 |
| References cited | 7 |


## ILLUSTRATION


Figure 1. Map showing location of water-quality sampling sites in the Ogallala aquifer ---- 3


## TABLES


Table 1. Statistical summary of water-quality data from the Ogallala Formation ---- 4

2. Chemical analyses of water from the Ogallala aquifer ---- 5

# RESULTS OF A RECONNAISSANCE WATER-QUALITY SAMPLING PROGRAM OF THE OGALLALA AQUIFER IN COLORADO, KANSAS, NEBRASKA, OKLAHOMA, SOUTH DAKOTA, AND TEXAS

By G. L. Feder and N. C. Krothe

## ABSTRACT

Results of a reconnaissance water-quality sampling program of the Ogallala aquifer indicates the water generally is suitable for most uses. Fluoride and selenium were the only chemical constituents found to exceed the National Interim Primary Drinking Water Regulations in water from some of the wells.

Unusually large silica concentrations in many of the water samples probably were due to the presence of amorphous silica in relatively young volcanic-ash deposits present in the aquifer. Because the largest silica concentrations (as much as 65 milligrams per liter) occurred in the northern part of the aquifer, the volcanic source was probably from the northwest.



READEX FICHE best copy available

## INTRODUCTION

The Ogallala aquifer consisting of rocks of late Tertiary age is an important source of water for residents of the High Plains Region of the western United States (fig. 1). In addition to providing irrigation water for farming, water from the Ogallala aquifer provides much of the water supply for municipalities, industries, and rural residents in the area. Because of the importance of the Ogallala aquifer to residents of the High Plains, the U.S. Geological Survey is doing an intensive study of the aquifer as part of the Regional Aquifer System Analysis Program. The project includes studies on the hydraulic properties and water-quality characteristics of the aquifer. As part of the water-quality study, an initial reconnaissance of the Ogallala aquifer was made to estimate the means and variances of major and minor chemical constituents in the water. This report describes the results of this program.

## SAMPLING

The southern Kansas, Oklahoma, and Texas area was sampled during the summer of 1980. The Colorado, central Kansas, Nebraska, and South Dakota area was sampled during the fall of 1980. To obtain water-quality data from the southernmost part of the Ogallala Formation in Texas, two chemical analyses obtained for other studies were used. One chemical analysis from Hansford County, Tex., was obtained from Bassett and others (1981). The chemical analysis from Lubbock County, Tex., was obtained from W. W. Wood (U.S. Geological Survey, unpublished data, 1981). Water samples for northwest Texas and western Oklahoma were collected by J. W. Oliver of the U.S. Geological Survey. All samples were collected from wells cased into the Ogallala Formation, and the samples were collected after pumping the well for at least 10 minutes.

## RESULTS

The water-quality data obtained from the reconnaissance study of the Ogallala aquifer indicates that the ground water generally is suitable for most uses. A statistical summary of the data is shown in table 1; results of the laboratory analysis are shown in table 2. Examination of the data in table 2 shows that the only chemical constituents that exceed the 1976 U.S. Environmental Protection Agency's National Interim Primary Drinking Water Regulations were fluoride and selenium. Gross alpha activity of some of the wells sampled was relatively high, but the method of determination did not exclude the contribution to gross alpha activity from uranium and radon. The 1976 National Interim Primary Drinking Water Regulations call for a maximum contaminant level due to gross alpha activity (incluing radium-226, but excluding radon and uranium) of 15 pCi/L (picocuries per liter); therefore, it is not known if the water contained gross alpha activity in excess of the standard.

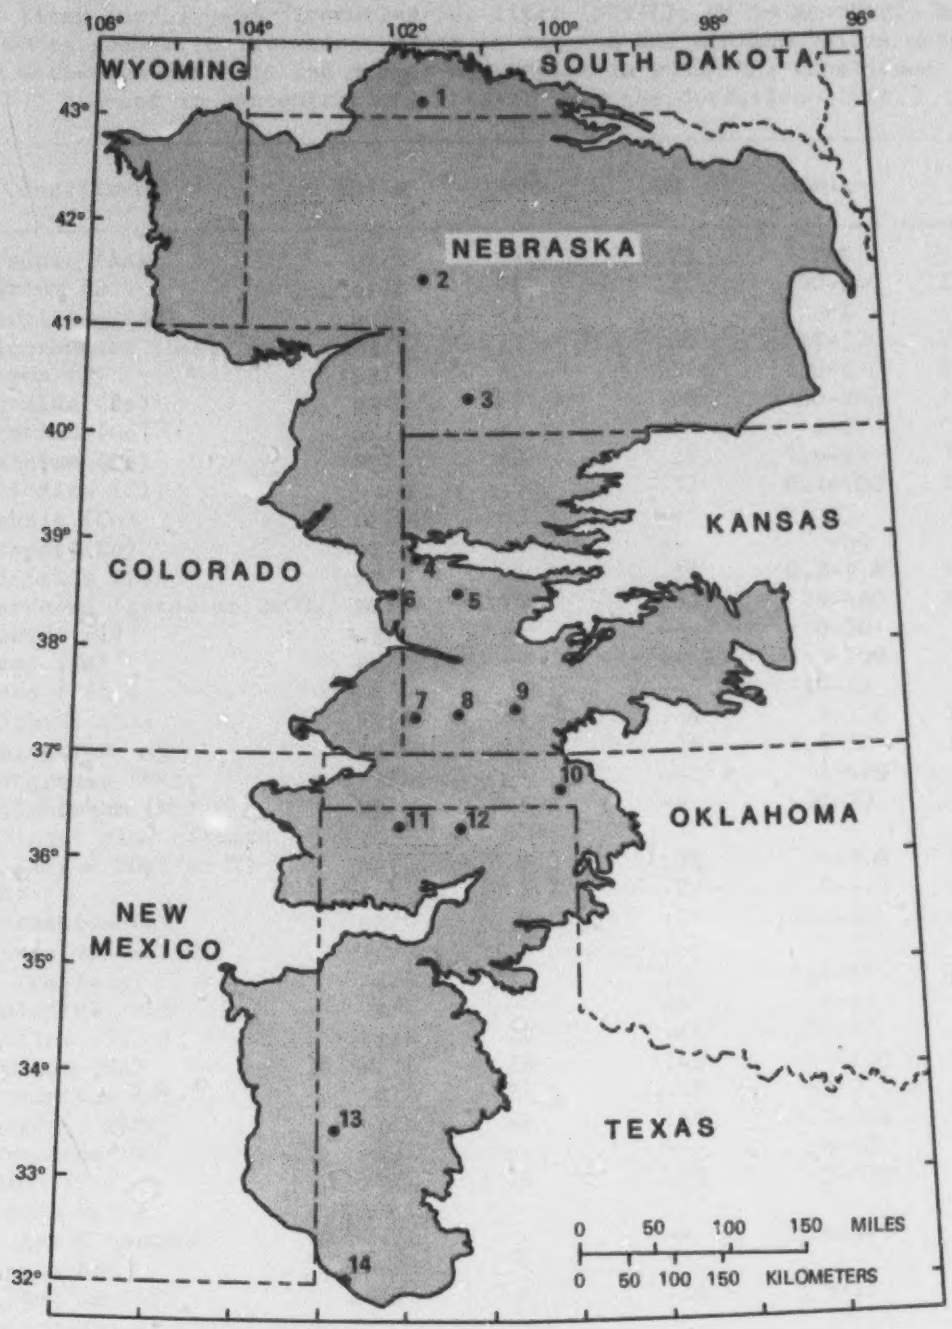


Figure 1.--Location of water-quality sampling sites in the Ogallala aquifer. (Circles indicate sampling sites.)

Table 1.--*Statistical summary of water-quality data from the Ogallala Formation*

[Data expressed as milligrams per liter (mg/L), micrograms per liter (µg/L), and picocuries per liter (pCi/L); GM is geometric mean; GD is geometric deviation; Range is maximum and minimum values obtained; Detection ratio is the number of samples in which the constituent was present in concentrations greater than the detection limit.]

| Constituent | Units | GM | GD | Range | Detection ratio |
|---|---|---|---|---|---|
| Arsenic (As) | µg/L | 4.9 | 0.23 | 2-9 | 6:6 |
| Barium (Ba) | µg/L | 71 | .21 | 30-140 | 12:12 |
| Beryllium (Be) | µg/L | <1 | -- | <1 | 0:12 |
| Bicarbonate ($HCO_3$) | mg/L | 175 | .30 | 28-326 | 14:14 |
| Boron (B) | µg/L | 80 | .57 | <10-270 | 12:14 |
| Bromide (Br) | µg/L | 110 | .28 | <100-700 | 11:13 |
| Cadmium (Cd) | µg/L | <1 | -- | <1-2 | 2:12 |
| Calcium (Ca) | mg/L | 40 | .25 | 7.6-99 | 14:14 |
| Chloride (Cl) | mg/L | 13 | .57 | 0.4-100 | 14:14 |
| Cobalt (Co) | µg/L | <3 | -- | <3 | 0:12 |
| Copper (Cu) | µg/L | <10 | -- | <50 | 0:13 |
| Fluoride (F) | mg/L | 1.1 | .33 | 0.2-2.8 | 13:13 |
| Hardness (total as $CaCO_3$) | mg/L | 174 | .30 | 25-460 | 14:14 |
| Iodide (I) | µg/L | -- | -- | <10-50 | 8:12 |
| Iron (Fe) | µg/L | -- | -- | <5-190 | 3:14 |
| Lead (Pb) | µg/L | -- | -- | <10-12 | 1:6 |
| Lithium (Li) | µg/L | 45 | .34 | 7-150 | 14:14 |
| Magnesium (Mg) | mg/L | 17 | .41 | 1.4-50 | 14:14 |
| Manganese (Mn) | µg/L | -- | -- | <1-470 | 3:14 |
| Molybdenum (Mo) | µg/L | -- | -- | <10-22 | 5:12 |
| Nitrate plus nitrite ($NO_3 + NO_2$)(as N) | mg/L | 2.3 | .32 | .6-7.0 | 14:14 |
| pH[1] | | 7.7 | .27 | 7.0-8.0 | 14:14 |
| Potassium (K) | mg/L | 6.6 | .23 | 3.6-20 | 14:14 |
| Dissolved solids (residue) | mg/L | 331 | .21 | 116-875 | 14:14 |
| Selenium (Se) | µg/L | -- | -- | <1-15 | 7:12 |
| Silica ($SiO_2$) | mg/L | 40 | .16 | 23-65 | 14:14 |
| Sodium (Na) | mg/L | 23 | .40 | 3-100 | 14:14 |
| Strontium (Sr) | µg/L | 821 | .47 | 52-3,700 | 14:14 |
| Sulfate ($SO_4$) | mg/L | 41 | .53 | 2.7-390 | 14:14 |
| Vanadium (V) | µg/L | -- | -- | <6-40 | 10:12 |
| Zinc (Zn) | µg/L | 14 | .76 | <3-370 | 11:13 |
| Gross alpha (as U natural) | pCi/L | -- | -- | <1.6-42 | 9:12 |
| Gross beta (as Cs-137) | pCi/L | 7.4 | .24 | 3.6-15 | 12:12 |
| Dissolved organic carbon (DOC) | mg/L | .6 | .21 | 0.4-1.2 | 6:6 |

[1]pH is given in standard units; statistics given are arithmetic mean and standard deviation.

Table 2.--*Chemical analyses of water from the Ogallala aquifer*

[µg/L = micrograms per liter; mg/L = milligrams per liter; pCi/L = picocuries per liter; NA = not analyzed.]

| Sample No. - - - - - | (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) | (11) | (12) | (13) | (14) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Constituent, in units | South Dakota, Bennett County | Nebraska, Arthur County | Nebraska, Hayes County | Kansas, Scott County | Kansas, Wallace County | Colorado, Kiowa County | Kansas, Stevens County | Kansas, Morton County | Kansas, Seward County | Oklahoma, Beaver County | Texas, Sherman County | Texas, Hansford County | Texas, Lubbock County | Texas, Martin County |
| Arsenic (As) in µg/L | 2 | 5 | 9 | 8 | 4 | 5 | NA | NA | NA | NA | NA | NA | NA | NA |
| Barium (Ba) in µg/L | 70 | 130 | 140 | 100 | 90 | 30 | 70 | 40 | 40 | 80 | 60 | 90 | NA | NA |
| Beryllium (Be) in µg/L | <1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | NA | NA |
| Bicarbonate ($HCO_3$) in mg/L | 28 | 59 | 244 | 256 | 171 | 183 | 220 | 240 | 220 | 250 | 280 | 260 | 326 | 116 |
| Boron (B) in µg/L | <10 | <10 | 80 | 120 | 30 | 270 | 100 | 260 | 170 | 80 | 160 | 140 | 270 | 110 |
| Bromide (Br) in µg/L | <100 | 100 | 100 | 100 | 100 | 700 | 100 | 100 | 200 | 100 | <100 | 200 | NA | 100 |
| Cadmium (Cd) in µg/L | <1 | <1 | <1 | <1 | <1 | <1 | 2 | <1 | <1 | <1 | <1 | 1 | NA | NA |
| Calcium (Ca) in mg/L | 7.6 | 24 | 46 | 57 | 33 | 99 | 45 | 39 | 61 | 46 | 41 | 42 | 48 | 37 |
| Chloride (Cl) in mg/L | 0.4 | 22 | 3.8 | 17 | 4.6 | 49 | 18 | 15 | 14 | 100 | 14 | 6.5 | 36 | 19 |
| Cobalt (Co) in µg/L | <3 | <3 | <3 | <3 | <3 | <3 | <3 | <3 | <3 | <3 | <3 | <3 | NA | NA |
| Copper (Cu) in µg/L | <10 | <10 | <10 | <10 | <10 | <10 | <10 | <10 | <10 | <10 | <10 | <10 | <50 | NA |
| Fluoride (F) in mg/L | 0.2 | 0.3 | 0.9 | 1.5 | 1.0 | 2.1 | 0.9 | NA | 0.9 | 1.2 | 1.8 | 1.6 | 2.8 | 1.9 |
| Hardness (total as $CaCO_3$) mg/L | 25 | 79 | 170 | 230 | 120 | 460 | 200 | 250 | 240 | 170 | 250 | 210 | 276 | 187 |
| Iodide (I) in µg/L | <10 | <10 | <10 | 10 | <10 | 50 | 10 | 20 | 10 | 20 | 50 | 20 | NA | NA |
| Iron (Fe) in µg/L | <10 | <10 | <10 | <10 | <10 | 11 | <10 | <10 | <10 | <10 | 17 | <10 | 190 | <5 |
| Lead (Pb) in µg/L | <10 | <10 | <10 | <10 | 12 | <10 | NA | NA | NA | NA | NA | NA | NA | NA |
| Lithium (Li) in µg/L | 7 | 18 | 35 | 59 | 26 | 150 | 39 | 100 | 41 | 35 | 81 | 62 | 80 | 60 |
| Magnesium (Mg) in mg/L | 1.4 | 4.6 | 13 | 22 | 8.3 | 50 | 21 | 37 | 21 | 14 | 35 | 24 | 38 | 23 |
| Manganese (Mn) in µg/L | <1 | 1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | <1 | 10 | <1 | <10 | 470 |
| Molybdenum (Mo) in µg/L | <10 | <10 | <10 | <10 | <10 | 12 | 14 | 22 | 11 | <10 | 16 | <10 | NA | NA |
| Nitrate plus nitrite ($NO_3$+$NO_2$) (as N) in mg/L | 1.4 | 7.0 | 2.7 | 4.2 | 2.4 | 1.7 | 2.4 | 2.0 | 2.9 | 3.5 | 0.6 | 2.1 | 4.9 | 0.6 |
| pH, in standard units | 7.0 | 7.3 | 7.8 | 7.7 | 7.9 | 7.8 | 7.8 | 7.9 | 7.8 | 7.8 | 7.8 | 7.7 | 7.5 | 8.0 |
| Potassium (K) in mg/L | 4.8 | 11 | 12 | 6.6 | 4.2 | 5.5 | 4.3 | 4.2 | 4.6 | 3.6 | 9.5 | 5.1 | 11 | 20 |
| Dissolved solids residue in mg/L | 116 | 206 | 310 | 385 | 204 | 875 | 310 | 421 | 416 | 480 | 350 | 311 | 454 | 286 |
| Selenium (Se) in µg/L | <1 | <1 | <1 | <1 | <1 | 15 | 3 | 6 | 9 | 1 | 3 | 2 | NA | NA |
| Silica ($SiO_2$) in mg/L | 63 | 63 | 65 | 55 | 23 | 56 | 33 | 29 | 23 | 35 | 27 | 39 | 40 | 44 |
| Sodium (Na) in mg/L | 3.0 | 8.8 | 20 | 24 | 18 | 76 | 22 | 45 | 44 | 100 | 24 | 18 | 49 | 8.4 |
| Strontium (Sr) in µg/L | 52 | 140 | 530 | 1,300 | 520 | 3,700 | 1,200 | 1,800 | 1,400 | 770 | 1,300 | 1,100 | 1,400 | 1,400 |
| Sulfate ($SO_4$) in mg/L | 2.7 | 8.0 | 26 | 61 | 20 | 390 | 51 | 130 | 130 | 49 | 67 | 32 | 66 | 28 |
| Vanadium (V) in µg/L | <6 | 23 | 25 | 30 | 16 | 40 | 17 | 21 | <6 | 21 | 26 | 16 | NA | NA |
| Zinc (Zn) in µg/L | 370 | 240 | 11 | 20 | 12 | 15 | 5 | 5 | 8 | <3 | <3 | 6 | 110 | NA |
| Gross alpha in pCi/L (as U natural) | <1.6 | <2.4 | 15 | 24 | 11 | 42 | 13 | 24 | 15 | <6.4 | 12 | 15 | NA | NA |
| Gross beta (as Cs-137) in pCi/L | 3.6 | 9.3 | 15 | 8.2 | 3.8 | 13 | 6.9 | 8.2 | 7.4 | 4.2 | 12 | 8.1 | NA | NA |
| Dissolved organic carbon (DOC) in mg/L | 0.4 | 0.9 | 0.4 | 0.4 | 0.6 | 1.2 | NA | NA | NA | NA | NA | NA | NA | NA |

However, because of the relatively large concentrations in water from the few wells sampled (as much as 42 pCi/L), additional sampling needs to be done using criteria established by the U.S. Environmental Protection Agency to see if the regulation is exceeded.

Excessive fluoride and selenium concentrations in water from the Ogallala Formation have been reported in several publications describing water quality of the area (Bassett and Wood, 1978; Engberg, 1973). Both selenium and fluoride showed large variability in concentration throughout the study area, probably due to variability of the aquifer sediments. Two chemical constituents of geochemical interest that occur in relatively large concentrations in the study area are silica and strontium. Silica concentrations were unusually large for a nongeothermal ground water, with concentrations as much as 65 milligrams per liter obtained in the few samples collected for this study. The greatest silica concentrations were found in the northern part of the area, and probably are related to Quaternary volcanism that occurred to the west in the Rocky Mountains and covered the area with successive ash deposits (Elias, 1931). Volcanic-ash deposits generally are thicker to the north in the area underlain by the Ogallala Formation (E. D. Gutentag, U.S. Geological Survey, oral communication, 1981). Large silica concentrations probably are controlled by solubility of amorphous silica still present in these relatively young volcanic ash deposits (Jordan and others, 1964).

Relatively large strontium concentrations, as much as 3,700 µg/L found in most of the waters sampled in this study also result from the young age of the Ogallala sediments. The large amounts of strontium probably come from carbonate fossils in the formation and also from the sediments in the Ogallala Formation reworked from the underlying Niobrara Formation, Pierre Shale, and Dakota Formation of Cretaceous age. (E. D. Gutentag, U.S. Geological Survey, oral communication, 1981).

## SUMMARY AND CONCLUSIONS

Water in the Ogallala Formation of late Tertiary age generally is suitable for most uses. Fluoride and selenium were the only chemical constituents found to exceed National Interim Primary Drinking Water Regulations. The possibility that some water supplies may have exceeded standards for gross alpha activity or radium-226 and radium-228 was indicated by the samples having relatively high gross alpha activity. However, the regulation only includes the contribution to gross alpha activity from radium, and the method used to determine gross alpha activity in this study also included alpha activity from uranium and radon. Therefore, additional sampling in the Ogallala aquifer is needed to determine the type of gross alpha activity present.

## REFERENCES CITED


Bassett, R. L., and Wood, W. W., 1978, Computer simulation as an aid to interpreting geochemistry of fluoride in the Ogallala Aquifer, Texas *in* Hemphill, D. D., ed., Trace Substances in Environmental Health XII: Columbia, Mo., University of Missouri, p. 89-98.

Bassett, R. L., Weeks, E. P., Ceazan, M. L., Perkins, S. G., Signor, D. G., Redinger, D. L., Malcolm, R. L., Aiken, G. R., Thurman, E. M., Avery, P. A., Wood, W. W., Thompson, G. M., Stiles, G. K., 1981, Preliminary data from a series of artificial recharge experiments at Stanton, Texas: U.S. Geological Survey Open-File Report 81-149, 256 p.

Engberg, R. A., 1973, Selenium in Nebraska's groundwater and streams: Nebraska Water Supply Paper 35, 42 p.

Elias, M. K., 1931, The geology of Wallace County, Kansas: Geological Survey of Kansas Bulletin 18, 254 p.

Jordon, P. R., Jones, B. F., Petri, L. R., 1964, Chemical quality of surface waters and sedimentation in the Saline River Basin, Kansas: U.S. Geological Survey Water-Supply Paper 1651, 90 p.

U.S. Environmental Protection Agency, 1976, National Interim Primary Drinking Water Regulations: Office of Water Supply, EPA-570/9-76-003, 159 p.